



- ❑ Designed for use with ALL Broyce Level Control Relays
- ❑ Single electrode
- ❑ Stainless Steel material suitable for most non-flammable liquids
- ❑ Wire termination to probe using crimp method
- ❑ Protective rubber cover



ISO 9001:2015
Cert. No. 14125771

• INSTALLATION




Installation work must be carried out by qualified personnel.

- BEFORE INSTALLATION, ISOLATE ANY SUPPLIES.
- Take the wire from the Level Controller and terminate the stripped end in the crimp attached to the end of the electrode.
- Place the electrode in the container or tank at a suitable position where the liquid level needs to be sensed.
- Repeat the above process for the remaining number of electrodes.

Note that for tanks/containers that are conductive, the "Common" connection from the Level controller can be terminated directly to it.

Typical example of electrode arrangements (2 Level monitoring):

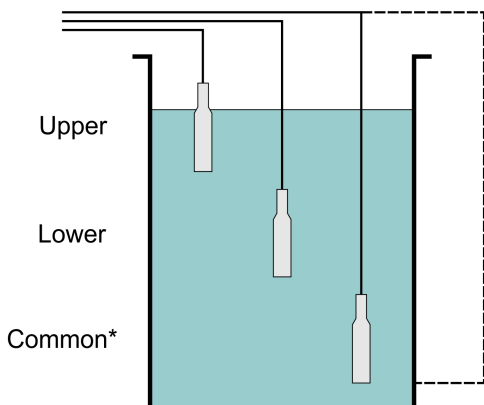

*Common probe not required if tank/container conductive. Connection from Level controller can then be made directly as shown by the dashed line.

• TECHNICAL SPECIFICATION

Mounting:	Free
Connection method:	Via M3 screw terminal/crimp
Electrode material:	Stainless steel (Grade 1.4305)
Weight:	≈60g
Maximum temperature:	70°C

• DIMENSIONS

